


SNAP-RING PLIERS

HSP-601T/N

These pliers are designed for removing wheel bearings from Toyota and Nissan vehicles, which are difficult to retrieve with ordinary snap ring pliers, and for detaching irregularly-shaped snap rings.

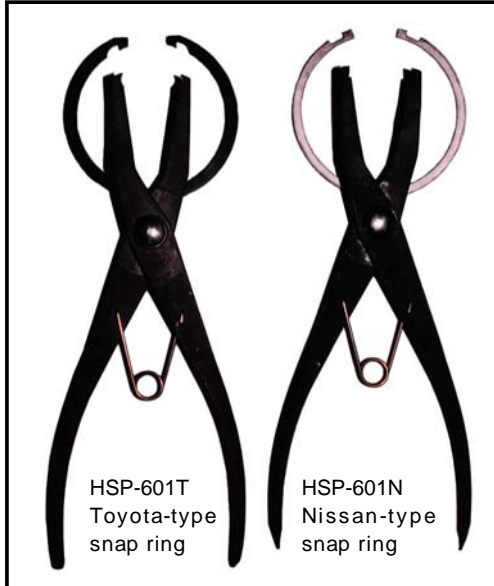

A slim version of the standard type, designed for holes (pin tip diameter of A1.5), is also available, in the HSP-601 (straight)/601B (with angled tip).

Removing / installing
the Toyota type



Removing
the Nissan type



Attaching
the Nissan type



After gripping the snap ring, the hooked part is inserted and moved left and right while pulling it upwards to remove the ring.

The notched side of the hook tip is held facing the outer side of the ring, and the ring is contracted and fitted into place.

